

HAS-204

20,000 lbs. Capacity

PALFINGER HOOKLIFT



STANDARD FEATURES INCLUDE:

- Available with 36-1/4" hook height
- 12ft - 14ft Containers
- Designed for 108" - 120" C.A.
- Designed for GVW of 19,000 - 26,000 LBS

The PALFINGER Principle

PALFINGER HOOKLIFT

Omaha Standard Inc.

P.O. Box 5757

Trenton, NJ 08638




Tel: 1-609-588-5400

Toll Free: 1-800-851-8938


Fax: 1-609-588-4104

www.americanrolloff.com


HAS-204
11.09

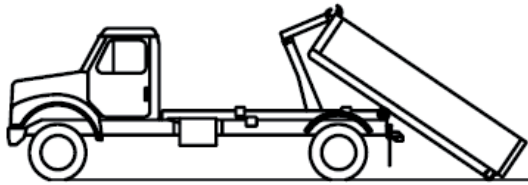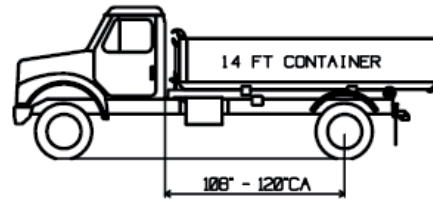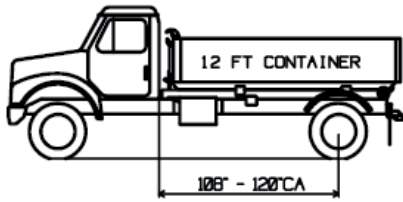


MAX. LOAD ANGLE 34 DEG

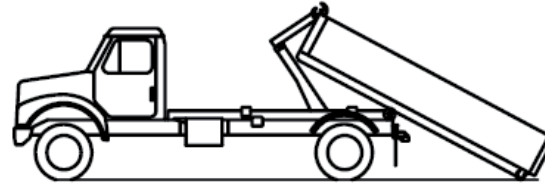

MAX. LOAD ANGLE 28 DEG

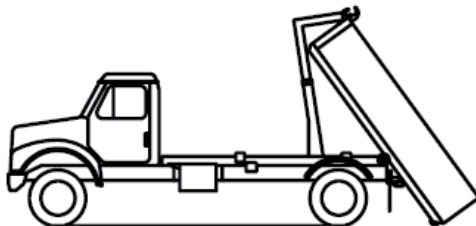

MAX. DUMPING ANGLE 54 DEG

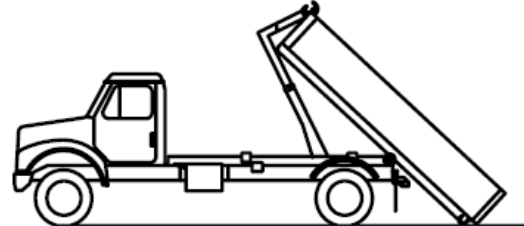

MAX. DUMPING ANGLE 43 DEG

FEATURES:

- 20,000 LBS capacity
- Easily picks up and dumps 12ft containers and 14ft flatbeds
- Dual lift cylinders for added strength and stability
- Sliding jib to adjust the weight distribution
- Three point container securement systems locks both front and rear of container
- Single articulation point design features less moving parts
- Single rear rollers with aluminum bronze bushings
- Inside cab controls never require the operator to leave the cab, electric over air controls, optional
- Low pressure 2800 PSI hydraulics operated with gear style pump, easily adapts to low pressure accessories
- Designed and manufactured in the United States
- Poly fenders with full width bumpers
- Pintle hook mounting plate is standard on all units
- LED stop, turn and marker lights with plug-in harness
- All models Include A-frame drawing
- Longer bodies can be loaded or unloaded with the addition of an ICC bumper
- Also available with either a 36-1/4" or 54" hook height

CUSTOMIZED QUICK CHANGE BODIES:

- Open top containers
- Closed storage bodies
- Salt and sand spreaders
- Tree spraying units
- Septic cleaning pumps
- Hydroseeders
- Concrete forms
- Scaffold delivery skids
- Recycling containers
- Flatbed bodies
- Dump bodies (standard & heated)
- Water tanks
- Spraying systems
- Liftgate bodies
- Cranes: skid mounted
- Bark mulch blowers
- Contractor bodies